


# Illuminator Installation

1. Remove the 4 pan head screws along the top of the Watchdog display securing the bezel.
2. Place the Illuminator over the bezel and use the provided screws to secure it.
3. Wire the leads to a 6-12V source. Do not hook up the Illuminator to an unregulated source. When connecting the Illuminator to a DC (battery) source, the red lead is positive. If this is an “always on” source you will need a switch to turn the Illuminator off. If you have a switch for your headlight, wire the leads into this switch. When connecting to a regulated AC source\* orient the polarity so that the light is at its dimmest. If you do not have any source on your bike you will need to rig up a small battery to your Illuminator.

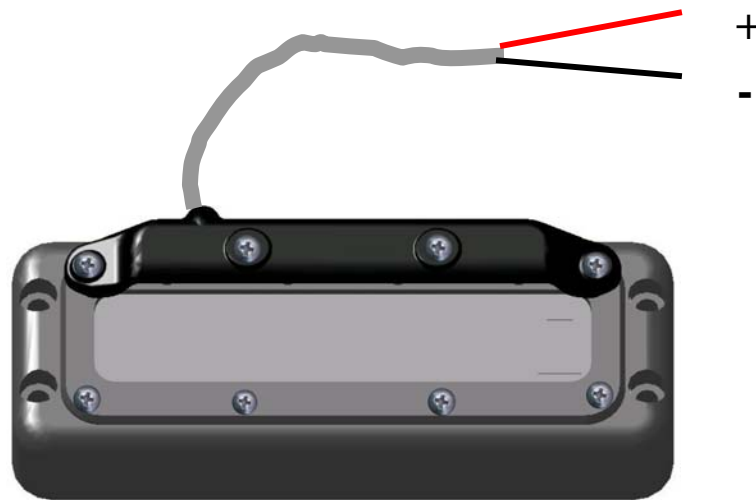

\*If your bike does not have a battery and you have lights, you have a regulated AC source.